



Case Hardening Temperature :	-5°C/+204°C
Color :	Black
Type:	TFE-P dipolymer type
Applications :	AFLAS® 100 and 150 grades are high performance fluoroelastomers with excellent base resistance and electrical resistivity due to the polymer structure which is totally different from FKM.
ASTM D2000 :	M2HK810A1-10B38 EO78(EO88) Z:HD75±5

Properties	Unit	Norm	Specification	Value
Density	Kg.m-3			1732
Hardness shore A	Point	ASTM D2240	75±5	78
Tensile strength	Mpa	ASTM D412	10 min	15.3
Ultimate elongation	%	ASTM D412	150 min	204
Tear resisance (Die C)	Kgf/cm	ASTM D624		31
B38 Compression set 22h@200°C	%	ASTM D395 B	50 max	24
A1-10 Heat Ageing 70h@250°C		ASTM D573		
-Hardness change	Point		+10 max	0
-Tensile strength change	%		-25 max	-2
-Ultimate elongation	%		-25 max	-13
A Heat Ageing 70h@275°C		ASTM D573		
-Hardness change	Point			0
-Tensile strength change	%			-35
-Ultimate elongation	%			+3

The above information corresponds to our current knowledge and is offered solely to provide possible suggestions for your own experimentations. It is not intended to substitute any testing you may need to conduct to determine suitability of our products for your end use. Elastotech SA makes no warranties and assumes no liability in connection with any use of the above information.

ELASTOTECH SA

1 Rue des Frères Lumière , 01200 Bellegarde/Valserine , France

Téléphone : +33 450 566 700 Télécopie : +33 450 566 709

Email : contact@elastotech.fr



Case Hardening Temperature :	-5°C/+204°C
Color :	Black
Type:	TFE-P dipolymer type
Applications :	AFLAS® 100 and 150 grades are high performance fluoroelastomers with excellent base resistance and electrical resistivity due to the polymer structure which is totally different from FKM.
ASTM D2000 :	M2HK810A1-10B38 EO78(EO88) Z:HD75±5


Properties	Unit	Norm	Specification	Value
EO78 ASTM Reference 101 Immersion 70h@200°C		ASTM D471		
-Hardness change	Point		-15 to +5	-13
-Tensile strength change	%		-40 max	-11
-Ultimate elongation	%		-20 max	+11
-Volume Change	%		0 to +15	+14.6
EO88 SAE Fluid No. 2 Blend 7700 Immersion 70h@200°C		ASTM D471		
-Hardness change	Point			-13
-Tensile strength change	%			-7
-Ultimate elongation	%			+13
-Volume Change	%			+13.9
EF ASTM Reference Fuel C Immersion 70h@23°C		ASTM D471		
-Hardness change	Point			-26
-Tensile strength change	%			-52
-Ultimate elongation	%			-36
-Volume Change	%			+39.6

The above information corresponds to our current knowledge and is offered solely to provide possible suggestions for your own experimentations. It is not intended to substitute any testing you may need to conduct to determine suitability of our products for your end use. Elastotech SA makes no warranties and assumes no liability in connection with any use of the above information.




Case Hardening Temperature :	-5°C/+204°C
Color :	Black
Type:	TFE-P dipolymer type
Applications :	AFLAS® 100 and 150 grades are high performance fluoroelastomers with excellent base resistance and electrical resistivity due to the polymer structure which is totally different from FKM.
ASTM D2000 :	M2HK810A1-10B38 EO78(EO88) Z:HD75±5

Structure and Features of AFLAS

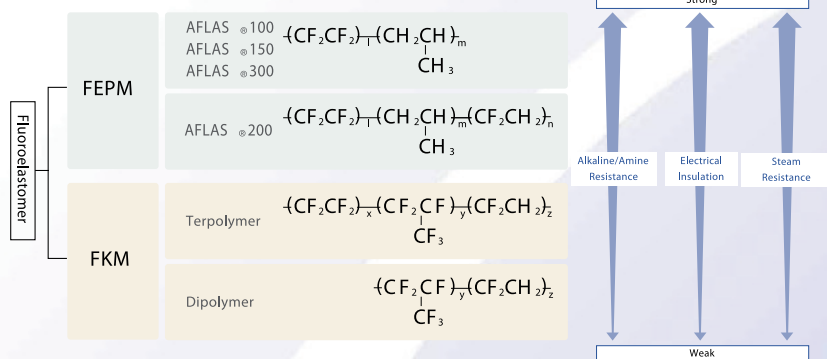

Overview of Properties

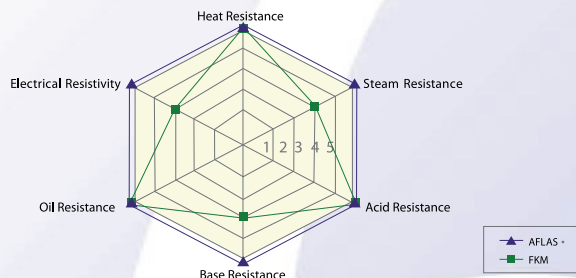

The above information corresponds to our current knowledge and is offered solely to provide possible suggestions for your own experimentations. It is not intended to substitute any testing you may need to conduct to determine suitability of our products for your end use. Elastotech SA makes no warranties and assumes no liability in connection with any use of the above information.

ELASTOTECH SA

1 Rue des Frères Lumière , 01200 Bellegarde/Valserine , France

Téléphone : +33 450 566 700 Télécopie : +33 450 566 709

Email : contact@elastotech.fr